


1 FASE VEILIGHEIDS EN BESCHERMINGSTRANSFORMATOREN

VOLGENS en 61558-2.4 / -2.6



U pri	400 Volt AC, 1 fase 50/60 Hz.										
U sec	24 V	42 V	230 V								
Norm:	- 2.6	- 2.6	- 2.4	Afmetingen						Gewicht	afzekeren
VA	Type No.			A	B	C	D	E	F	kg.	met (A-T):
25	TR 172.89	TR 172.97	TR 173.05	66	67	78	50	42	4,8	0,7	0,10
63	TR 172.90	TR 172.98	TR 172.56	78	71	87	56	45,5	4,8	1,2	0,20
100	TR 172.91	TR 172.99	TR 172.57	84	88	92	64	61	4,8	2,1	0,32
160	TR 172.92	TR 173.00	TR 172.58	96	90	103	84	70	5,6	2,9	0,50
250	TR 172.93	TR 173.01	TR 172.59	96	106	103	84	84	5,6	3,7	0,80
400	TR 172.94	TR 173.02	TR 172.60	120	100	121	90	80	5,6	5,3	1,25
630	TR 172.95	TR 173.03	TR 172.61	150	108	143	122	82	6,6	8,2	2,00
1000	TR 172.96	TR 173.04	TR 172.62	150	165	155	122	125	6,6	14,1	3,15
1600	TR 196.49	TR 196.54	TR 196.30	192	154	180	160	130	10,0	19,5	5,00
2000	TR 196.50	TR 196.55	TR 196.31	192	174	180	160	152	10,0	22,6	6,30
2500	TR 196.51	TR 196.56	TR 196.32	192	174	180	160	152	10,0	25,7	8,00
3150			TR-196.33	231	181	260	211	161	10,0	29,0	
4000			TR 196.34	231	200	260	211	180	10,0	42,0	

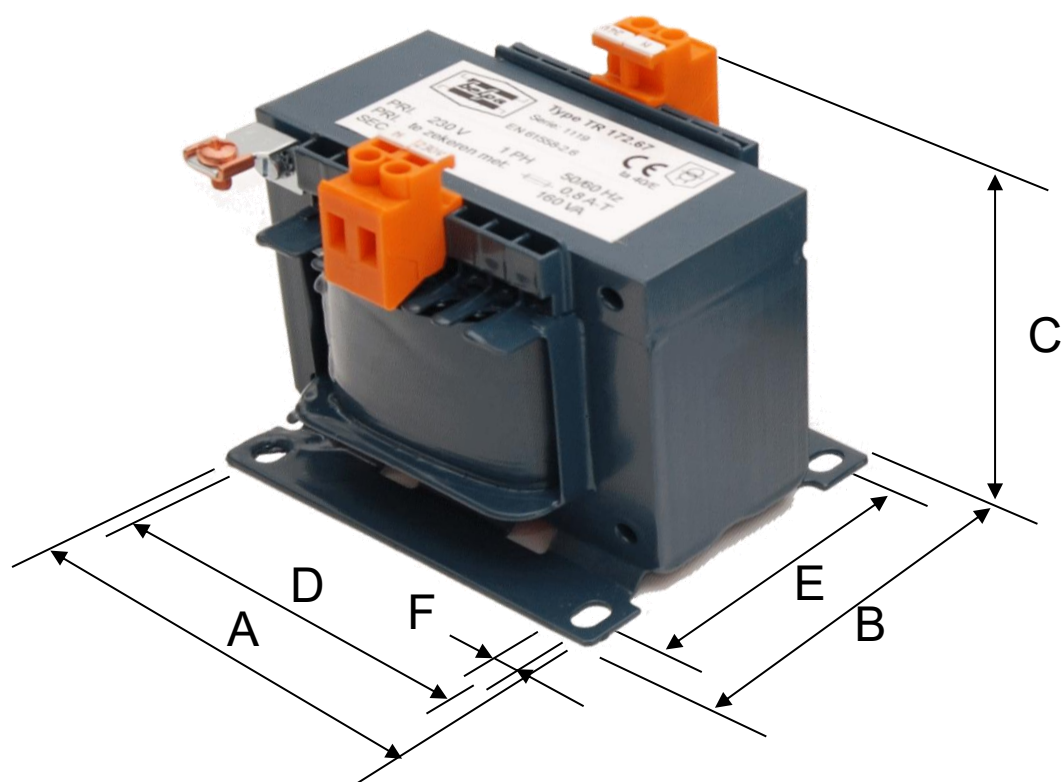

Belpa B.V.
 Postbus 800 - 3840 AV Harderwijk
 Nobelstraat 48 - 3846 CG Harderwijk
 Telefoon : +31 (0) 341 46 20 20
 Telefax : +31 (0) 341 42 52 67
 E-mail : info@belpa.nl
 Internet : www.belpa.nl

ING Bank rek.nr. 67.16.96.858
 IBANnr NL88ingB0671696858
 SWIFT INGBNL2A
 Postbank 831237
 Handelsreg.nr. 08016318 KvK Harderwijk
 BTWnr. NL005216709B03